


Easy Trike Rack

(Reversible for Right or Left Side Use)




Seat Clamp Size: _____

Installation Instructions

This pannier rack system attaches to the back of your seat and provides a simple way to carry light to medium loads.

Tools Required

You will need a 3mm and 5mm Allen (hex) wrench.

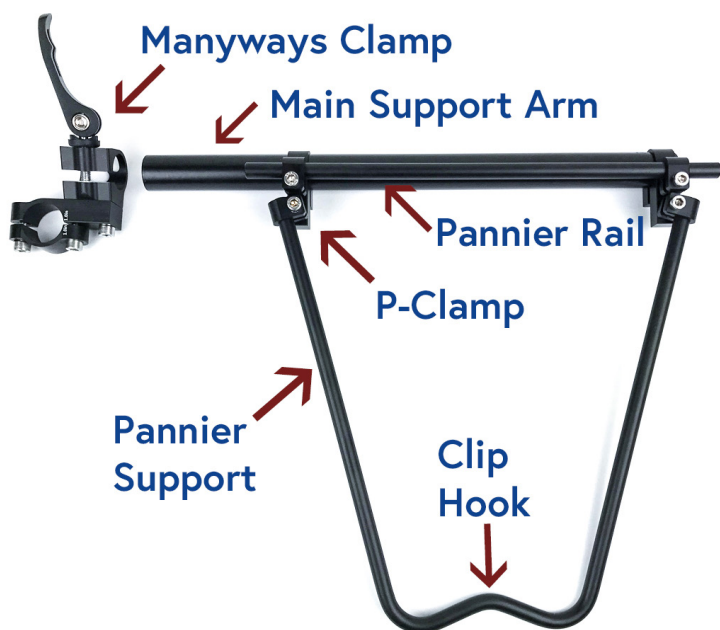


Assembly

Installation involves deciding on where to put the clamps, installing the clamps, and adjusting the level.

1. Decide which side of the trike you'd like to mount on. The rack is pre-configured to attach to the Left side of your trike, but can be easily swapped. If you would like to attach to the right side, then first completely loosen the P-Clamps that hold the 13in long Main Support Arm.

You can see that one end of the 13in Arm sticks out about 4in from the P-Clamp. To reconfigure the mount for the opposite side of the trike, simply slide the 13in Arm so that it sticks out about 4in from the other P-Clamp. Note: it may help to wedge a piece of plastic into the P-Clamp to hold it open while you move the Main Support Arm.

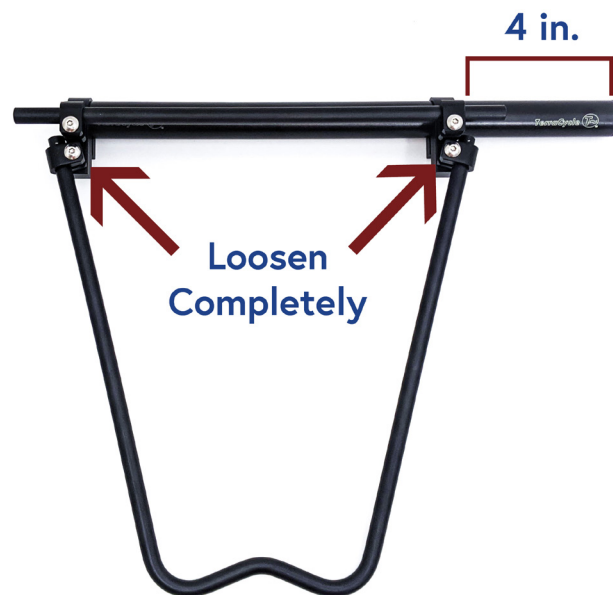

2. Decide where to put the Manyways Clamp. The Manyways Clamp needs 5/8in (16mm) of straight, horizontal tube to attach to. This clamp is precision made in a variety of sizes, **it's important to get the right size for your trike.**



Note that the Quick Release requires a bit of room to operate. If you have the ground clearance, things may work better if you mount the clamp so the rack will be on the underside of the seat tube and not the top.




3. Loosely Attach the Clamp. Ensure the clamp isn't on a curving part of the tube. Tighten the 6mm bolts using a 5mm Allen wrench. Make sure the gap between the clamp faces is the same on both sides



4. Plug in the rack and adjust for level. Keep in mind that if you have rear suspension, the back of the trike may "squat" a bit when you sit down. In that case, adjust the angle of the rack upwards to compensate. Tighten the clamp bolts firmly (6N-m or so).

5. Adjust the side to side angle so the bottom of the rack clears the rear of the trike even if the suspension bottoms out.

6. Tighten the Quick Release or optional clamping bolt firmly. It should be possible to remove and reinsert the rack by simply flipping the Quick Release. If you don't have room to operate a Quick Release, or prefer a fixed bolt, use the optional M6x30 bolt with 2 washers instead.

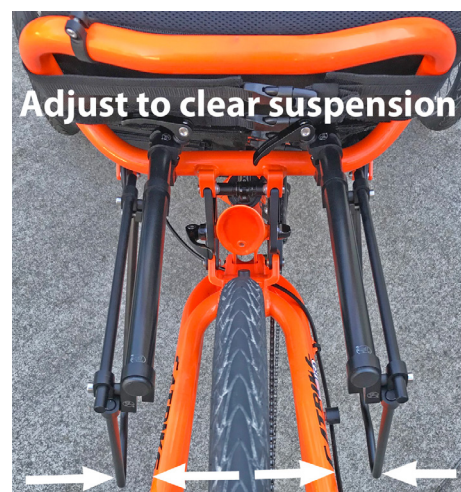

7. Attach your panniers and go! The racks are designed for light to medium loads (7-8Kg, 15-18lbs max).



That's it! May you enjoy years and years of riding with extra storage that's easy to take with you!